




BlackBerry Curve 8900 Antenna Replacement

If your blackberry's antenna is broken, this guide can help you replace it.

Written By: Johnny Tran

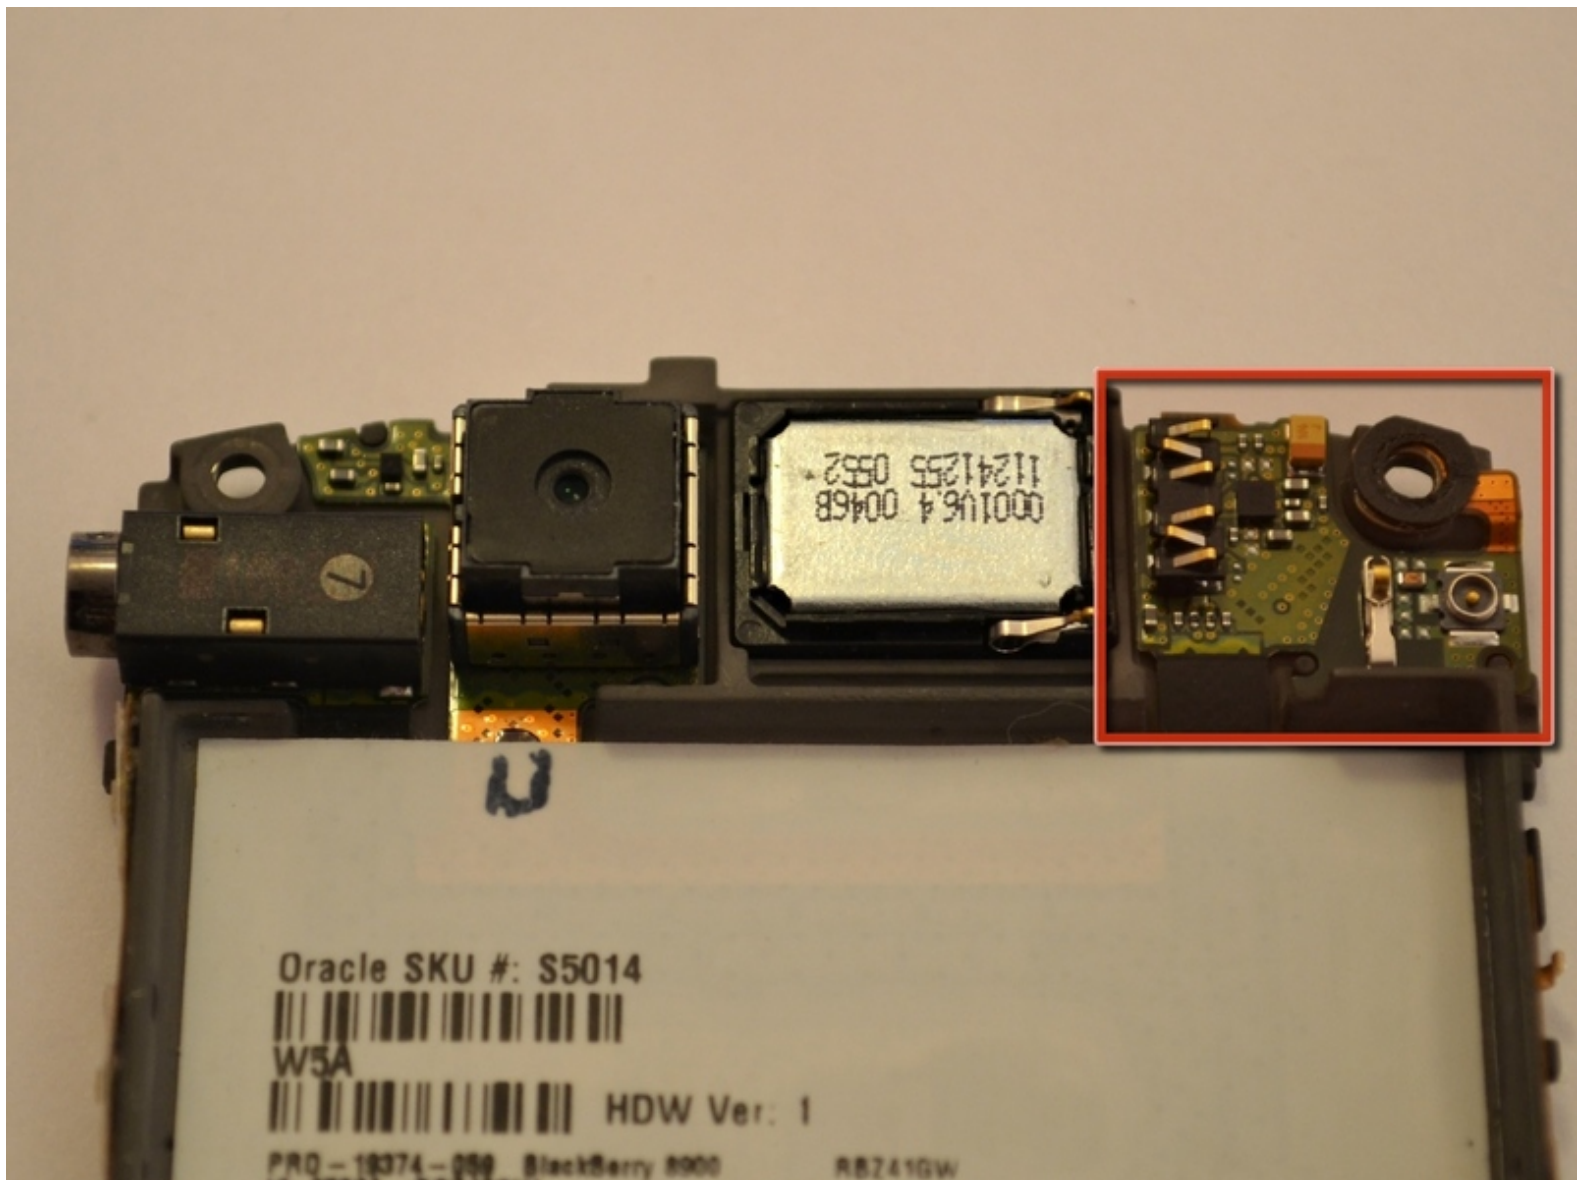




TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Antenna

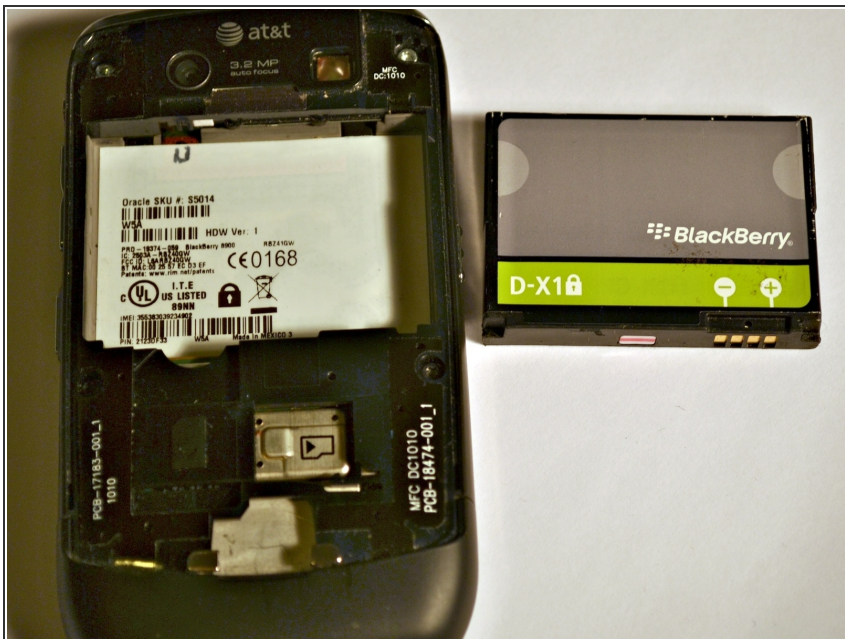

- Remove battery cover and battery on the back of the device.

Step 2



- Using a plastic opening tool, remove the bottom cover.

Step 3




- This will reveal 6 screws on the back, remove the screws and be careful not to lose them.

Step 4




- Remove the rear cover of the device.

Step 5

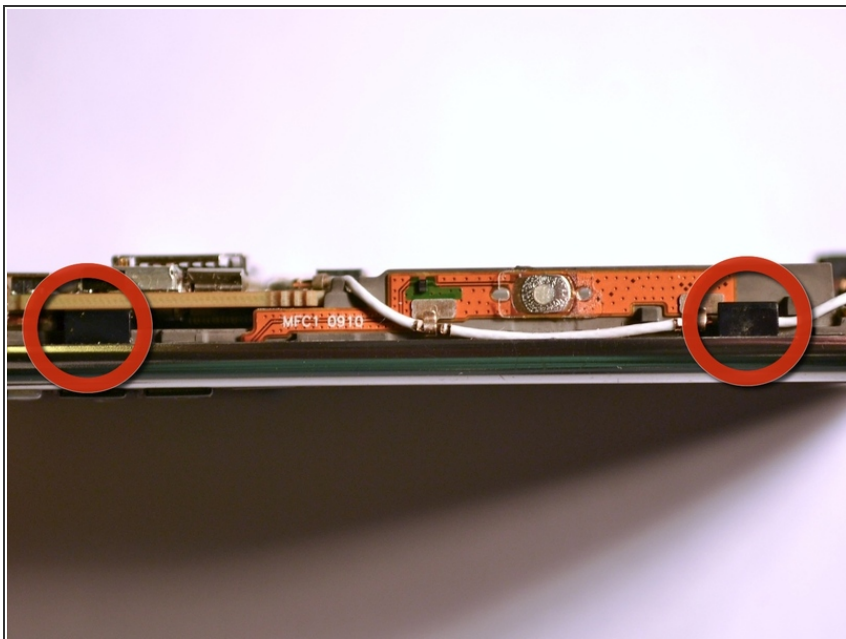



- Remove the motherboard part of the phone from the last piece of case by releasing the black tabs on both sides.

Step 6

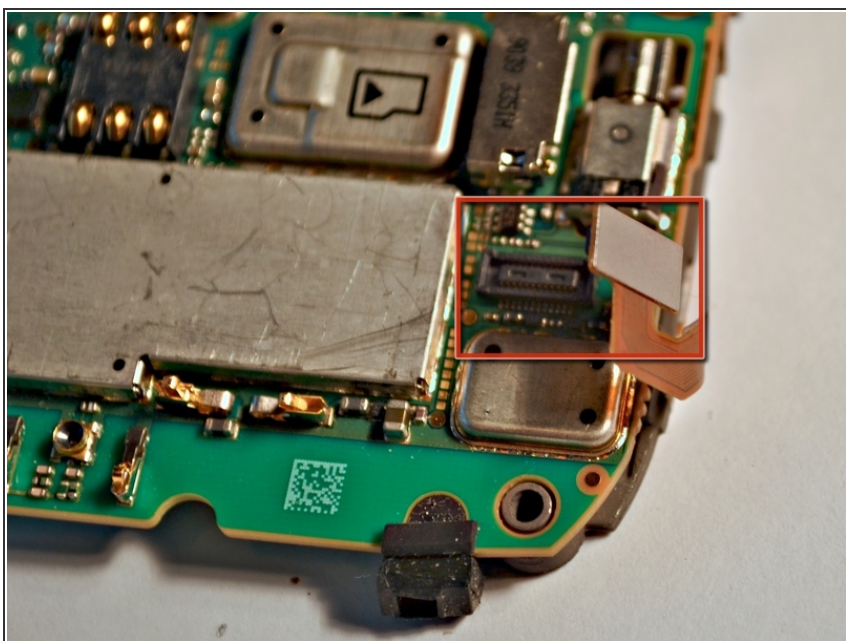



- Detach the ribbon cable on the front of the motherboard.

Step 7

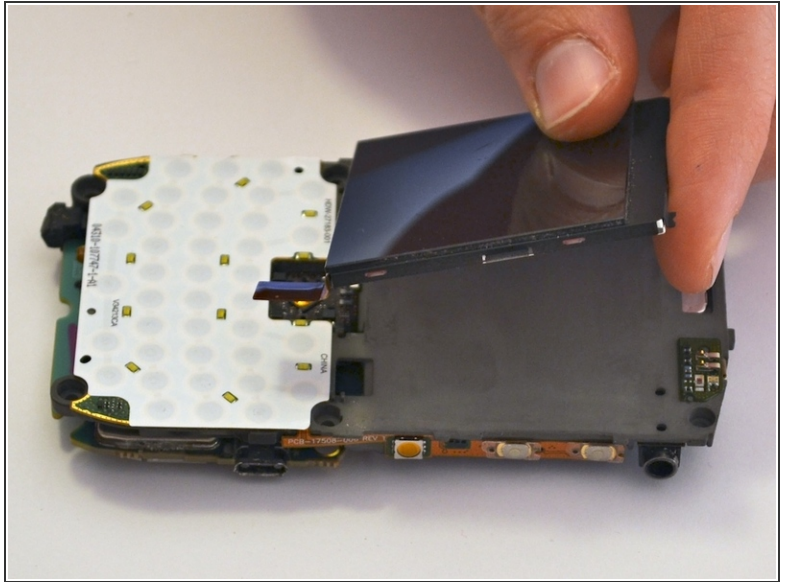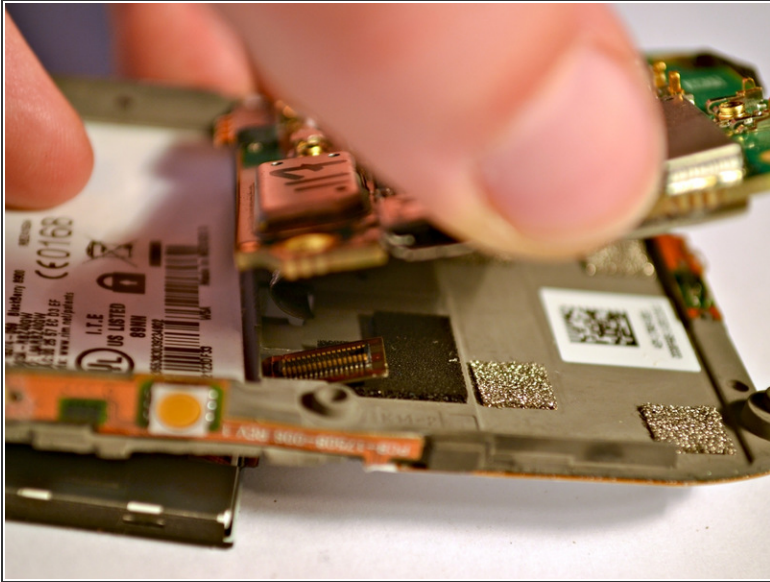



- Remove the screen to keep it from being damaged.

Step 8

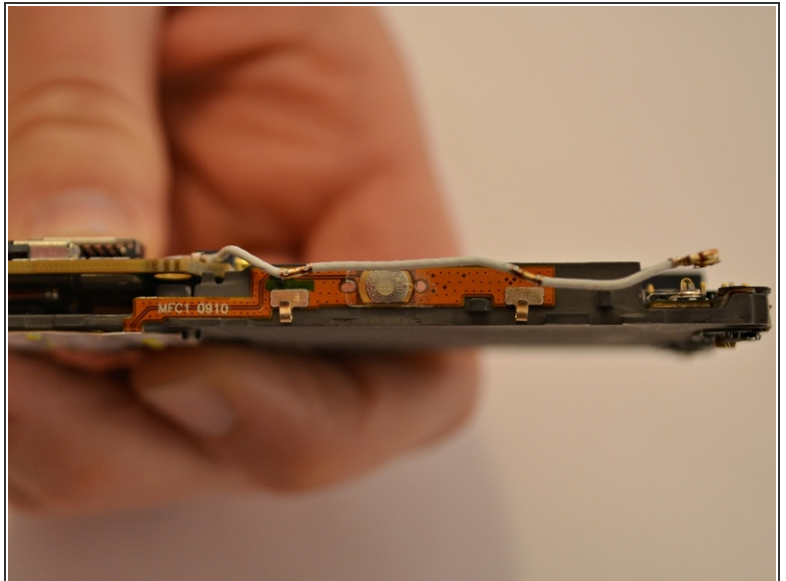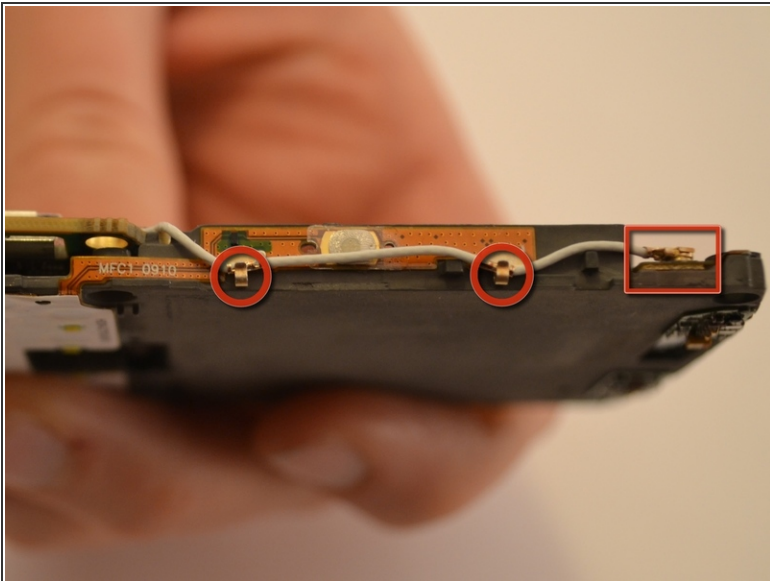

- Detach the antenna wire at all 3 locations.

Step 9

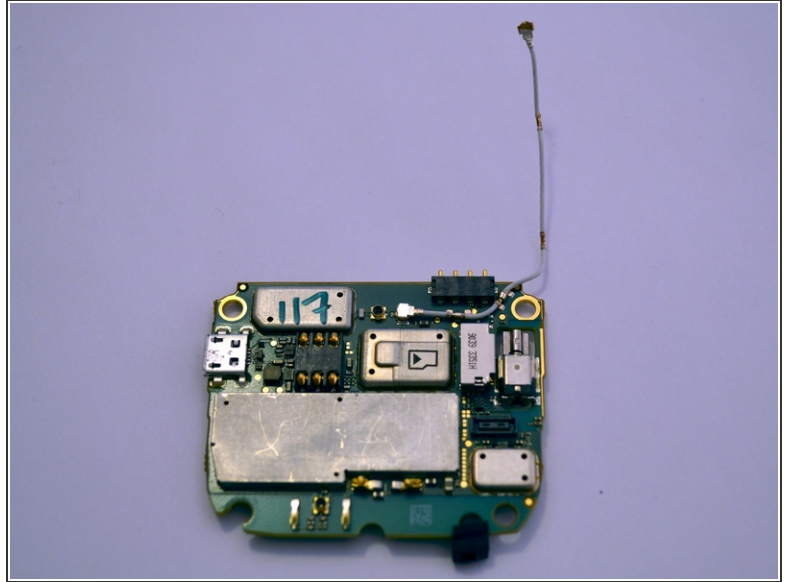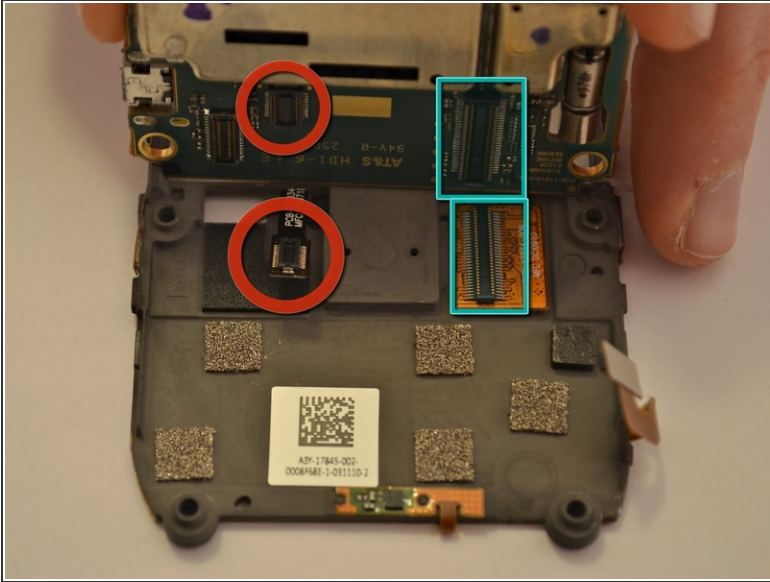

- Tilt the motherboard up and detach both ribbon connections.
- Remove the motherboard.

Step 10



- Replace the entire center piece of the case to replace the antenna.

To reassemble your device, follow these instructions in reverse order.

